


Embedded GSM Antenna ANT-GXE477

Miniature triband GSM antenna for applications like EPOS, remote metering and tracking devices

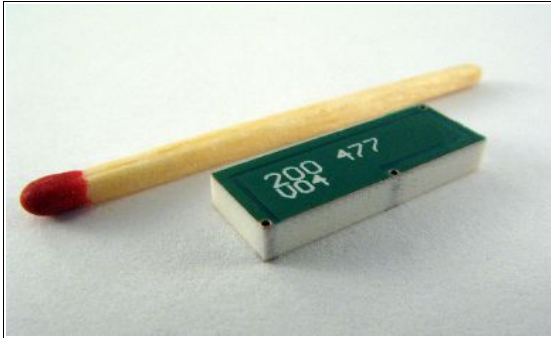

Technical data GSM

Frequency range:

- GSM 850: 824 – 894 MHz VSWR 2:1 Gain 0 dBi
- GSM 900: 880 – 960 MHz, VSWR 2:1 Gain 0 dBi
- GSM 1800: 1710 – 1880 MHz, VSWR 2:1, Gain 1 dBi
- GSM 1900: 1850 – 1990 MHz, VSWR 2:1, Gain 1 dBi
- Impedance: 50 Ohm
- Max power: 5 W
- Dimensions in mm: 20,5 x 7 x 3,2 mm

This SMT Antenna will be delivered "Tape and Reel".

It can be used as a Triband GSM 900 / 1800 / 1900 or as a GSM 850 / 1800 / 1900 with matching circuit.

Starter kit board ANT-GXE477

